


## System Architecture

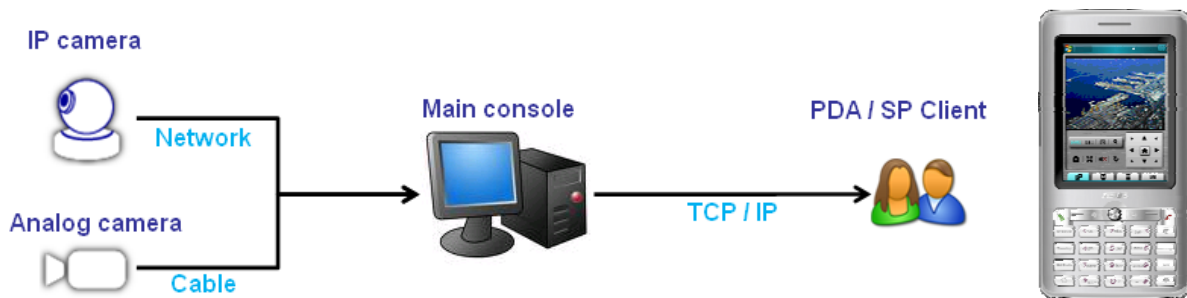

## Specifications

### System and Live Display:

- **Multi-view Snapshot:** Display up to 16ch snapshot as camera list to select camera video.
- **Live Video:** Display single live video channel in half-screen with control panel or display on full-screen.
- **Intelligent PTZ:** Support on PTZ cameras and software enabled digital PTZ functions are both available in NUUO PDA/SP Client. Support manually control or use preset point control PTZ cameras.
- **I/O Control:** Monitor status of digital input devices and manually trigger digital output devices.
- **Monitor Resolution:** support resolutions between 320x240 and 480x800 (the video will fit to 4:3 aspect ratio automatically)
- **Network:** Connect with NUUO MainConsole v3.2.0 above via TCP/IP.
- **Bandwidth:** NUUO MainConsole handle video compression with stream profile function to optimize bandwidth usage.
- **User Authority:** Login PDA / SP Client with username and password of NUUO MainConsole to protect privilege.

### System Requirements

<b>CPU</b>	Intel StrongARM or 100% compatible
<b>RAM</b>	Minimum 64 Mbyte
<b>Network</b>	Ethernet (256Kbit or higher recommended)
<b>Graphics Card</b>	240 x 320(minimum) / 480*800(maximum) , 16 bits color
<b>OS Supported</b>	Microsoft Windows Mobile 5.0 / Mobile 6.0 / Mobile 6.5

### Testing Device

<b>PDA Client</b>	HTC touch / HTC HD2
<b>Smart Phone Client</b>	HTC S730