


## NUUO Titan Pro



## System Diagram

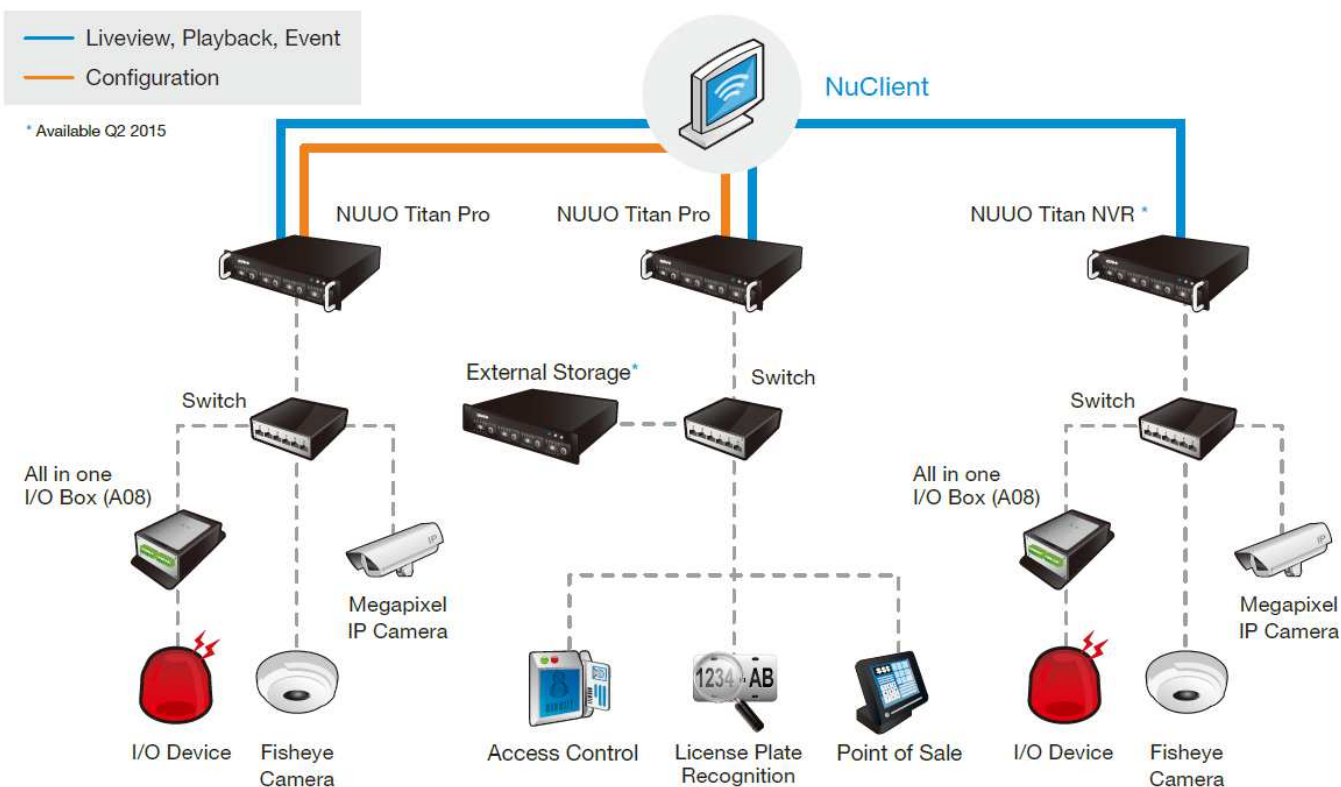

## Product Overview

NUUO Titan Pro is the product that represents the next stage in VMS evolution. Rock solid, easily manageable, with powerful recording and viewing options available. Featuring revolutionary modular system structure that is made to handle middle to large project size, NUUO Titan Pro is the ideal choice for your enterprise. Featuring technology that focuses on delivering stable video recording performance, recording failover, and 3rd party integration choice, you will be impressed with the stability and flexible options with NUUO Titan Pro.

## Main Features

## **Server Highlight**

- System Navigator: centralized management for multi-sites (up to 32 sites) on unified NuClient
- Diagnostic Service: retrieving important logs from server and client for troubleshooting
- Linux based system
- Records up to 64 megapixel cameras per Recording Server
- High throughput: supporting up to 64 channels of 5-Megapixel cameras, 250~550Mbps (TP-8000R/TP-8000RP).
- 3rd party integration – Point of Sale, Access Control and License Plate Recognition
- Supports over 2000 camera models from more than 100 brands, and RTSP video stream

Support list: [http://www.nuuo.com/SupportCamera.php?node\\_id=4](http://www.nuuo.com/SupportCamera.php?node_id=4)

### ■ **Enterprise Management**

- Multi-sites support.
- Centralized I/O and event respond systems
- Embedded NTP server
- Volume group to distribute cameras to assigned volumes
- Individual Retention Condition (IRC) per device
- PTZ control priority
- Powerful authorization for device permission and function privilege

### ■ **Stability**

- Support RAID 0,1, 5, and 10
- Support redundant power (TP-8000RP)
- Support hardware watchdog (TP-8000R and TP-8000RP) and software watchdog

### ■ **Open Platform**

- ONVIF Profile compatible
- Camera multiple stream support
- Multiple codec support : H.264, MJPEG, MPEG4 and MxPEG

### ■ **Value-added Benefits**

- Stream up to 256ch live viewing connections per server to multiple clients simultaneously
- Camera edge motion detection
- Support continuous, scheduled, event based and I/O based recording
- Schedule-based and input-triggered boosting record
- Schedule-based user management
- Scheduled Backup video to FTP location
- Watermark for video verification
- Dual gigabit Ethernet ports

## **Client Highlight**

- Cross platform for Windows and Mac
- All in one NuClient for remote configuring and viewing

- 10x10 liveview and playback capacity
- Customized layout
- **Enterprise Management**
  - Centralized E-map
  - Centralized I/O Panel and Event Panel
  - Public and Private View/View profile for each user
  - View Tour to loop through selected Views
- **Open Platform**
  - Export video with 3rd party data overlay
  - Generic Fisheye Dewarp technology for all fisheye cameras
  - Panorama 360° PTZ — Immervision and fisheye camera
  - Support multiple stream profile
  - Auto-switch stream profile
- **Value-added Benefits**
  - Support mobile client for iPhone / iPad / Android
  - NUUO Image Fusion Technology — stitch up to 10 cameras together
  - Layout Wizard - customized layout for viewing
  - Instant Playback on live view, e-map and event list
  - Twin Clients to support identical, full featured software client and web client
  - Support digital and optical PTZ
  - Support preset and patrol
  - Save video clips into AVI, ASF and MOV
  - Intelligent Search in playback

### External Support

- External storage through 3rd party DAS, iSCSI
  - \* Support list [http://www.nuuo.com/SupportCamera.php?node\\_id=12](http://www.nuuo.com/SupportCamera.php?node_id=12)
- Support third party Point of Sale, Access Control and License Plate Recognition
- Support up to 256 NUUO I/O boxes per server (A08)
- Support APC Uninterrupted Power Supply (Smart-UPS 750 VA / APC Back-UPS 500 ES / APC Smart UPS 1500 / APC Smart UPS 3000)

### Hardware Specifications

Model		TP-4160R	TP-8160R	TP-8160RP
	NT-4040	NT-4040R	NT-8040R	NT-8040RP
Product Image				

Type	Tower	Rack-mount 1U	Rack-mount 2U	Rack-mount 2U
<b>CPU</b>	Intel Atom	Intel Atom	Intel Core i5	Intel Core i5
<b>Number of Drives</b>	4xSATA II	4xSATA II	8xSATA II	8xSATA II
<b>Max Storage Per Drive**</b>	6TB	6TB	6TB	6TB
<b>Max Internal Total Storage***</b>	24TB	24TB	48TB	48TB
<b>RAID Level</b>	RAID 0, 1, 5, 10			
<b>I/O Interface</b>	6 x USB 2.0 (for mouse, UPS); 1 x eSATA (for DAS)	4 x USB 2.0 (for mouse, UPS); 1 x eSATA (for DAS)	2 x USB3.0; 2 x USB2.0; 1 x eSATA (for DAS)	2 x USB3.0; 2 x USB2.0; 1 x eSATA (for DAS)
<b>LAN</b>	2 x Gigabit Port, RJ45			
<b>LAN Transmission Speed</b>	10/100/1000 Mbps			
<b>Voltage</b>	100-240V	100-240V	100-240V	100-240V
<b>Power Consumption</b>	Full loading:50W Max: 250W	Full loading:50W Max: 250W	Full loading: 150W Max: 500W	Full loading: 160W Max: 500W (Redundant Power)
<b>Device Dimension (HxWxD)</b>	212 x 200 x 318 mm	45 x 447 x 429 mm	88 x 447 x 583 mm	88 x 447 x 583 mm
<b>Device Weight (Without Drive)</b>	5.3 kg (11.7 lbs)	6.0 kg (13.2 lbs)	11.4 kg (25.1 lbs)	13.2 kg (29.1 lbs)
<b>Temperature</b>	Operating: 0°C-40°C			
<b>Humidity</b>	Operating: 5%-95%			
<b>Software Specification</b>				
<b>Server Operating System</b>	Linux	Linux	Linux	Linux
<b>Client Operating System</b>	Windows XP (32-bit) / Win7 (32 and 64-bit)/ Win8 (32 and 64-bit)/ Win8.1 (32 and 64-bit) Mac OS X v10.7, v10.8, v10.9			
<b>License Type</b>	Professional / Enterprise / Ultimate / Metadata channel licenses*			
<b>Max Number of Cameras per Recording Server</b>	64	64	64	64
<b>Number of Stream Out per Recording Server</b>	<b>TP series: 256</b>			
	<b>NT series: 128</b>			
<b>Number of Camera per NuClient</b>	400	400	400	400
<b>ONVIF Device Support</b>	V	V	V	V
<b>Video Compression</b>	H.264, MPEG4, MJPEG, MxPEG			
<b>Multiple Stream Profile</b>	V	V	V	V

<b>Recording Throughput</b>	250 Mbps (MAX), 150 Mbps (OPTIMAL)		<b>TP-8000 series</b>	250 Mbps (1 Volume Group) 400 Mbps (2 Volume Groups) 550 Mbps (3 Volume Groups)
			<b>NT-8000 series</b>	250 Mbps
<b>3<sup>rd</sup> Party Support (CT series only)</b>	Point of Sale, Access Control, License Plate Recognition (Depends on plugin installed)			
<b>Metadata Function (TP series only)</b>	<ol style="list-style-type: none"> <li>1. Live view and playback line by line with video</li> <li>2. Metadata Search</li> </ol>			
<b>Export</b>	<b>TP series:</b> AVI, Original AVI, ASF, MOV			
	<b>NT series:</b> AVI, ASF, MOV			
<b>Number of Live View Spot-out(Local display)</b>	<b>TP-4000 series:</b> 4CH per View, View tour to 64CH		16CH per View, View tour to 64CH	
	<b>NT-4000 series:</b> 1CH per View, View tour to 64CH			
<b>Recording Type</b>	Continuous record, trigger record by digital input, motion-triggered record, event-triggered record, boosting record( <b>TP series only</b> ), record by schedule, and manual trigger record on NuClient			
<b>Event Pre-record and Post-Record</b>	√	√	√	√
<b>Network Time Protocol (NTP)</b>	√	√	√	√
<b>Joystick Support</b>	√	√	√	√

<b>Supported IP Camera Brands</b>	<a href="#">ACTi</a>	<a href="#">ADT</a>	<a href="#">Airlive</a>	<a href="#">Alarm.com</a>
	<a href="#">Alphatech</a>	<a href="#">American Dynamics</a>	<a href="#">AMTK</a>	<a href="#">Arecont</a>
	<a href="#">ARM</a>	<a href="#">ATV</a>	<a href="#">Asoni</a>	<a href="#">AXIS</a>
	<a href="#">Aver</a>	<a href="#">BASLER</a>	<a href="#">Bolide</a>	<a href="#">BOSCH</a>
	<a href="#">Brickcom</a>	<a href="#">Bullwark</a>	<a href="#">Centrix</a>	<a href="#">CISCO</a>
	<a href="#">CNB</a>	<a href="#">COP</a>	<a href="#">CORUM</a>	<a href="#">Dahua</a>
	<a href="#">Digital Watchdog</a>	<a href="#">D-Link</a>	<a href="#">DlinkCN</a>	<a href="#">DYNACOLOR</a>
	<a href="#">Eneo</a>	<a href="#">Ernitec</a>	<a href="#">Etrovision</a>	<a href="#">Everfocus</a>
	<a href="#">FINE</a>	<a href="#">Forenix</a>	<a href="#">GE</a>	<a href="#">Grandstream</a>
	<a href="#">Grundig</a>	<a href="#">Guardeon</a>	<a href="#">Guardliner</a>	<a href="#">HIKVISION</a>
	<a href="#">Histream</a>	<a href="#">Honeywell</a>	<a href="#">i-Mege</a>	<a href="#">InscapeData</a>
	<a href="#">IQinVision</a>	<a href="#">Jetstor</a>	<a href="#">JVC</a>	<a href="#">LevelOne</a>
	<a href="#">LG</a>	<a href="#">Lilin</a>	<a href="#">Linksys</a>	<a href="#">Lumenera</a>
	<a href="#">MegaIP</a>	<a href="#">Messo</a>	<a href="#">MOBOTIX</a>	<a href="#">Milesight</a>
	<a href="#">NetworkCamera</a>	<a href="#">NTIC</a>	<a href="#">On Electronics</a>	<a href="#">Onvif</a>
	<a href="#">Panasonic</a>	<a href="#">Pelco</a>	<a href="#">PIXORD</a>	<a href="#">PLANET</a>
	<a href="#">Probe</a>	<a href="#">Rover</a>	<a href="#">Saerim</a>	<a href="#">Samsung</a>
	<a href="#">SANTEC</a>	<a href="#">SANYO</a>	<a href="#">Shany</a>	<a href="#">Sony</a>
	<a href="#">StarDot</a>	<a href="#">Sunell</a>	<a href="#">Techson</a>	<a href="#">Telview</a>
	<a href="#">Tiandy</a>	<a href="#">TOSHIBA</a>	<a href="#">TRUEN</a>	<a href="#">UDP</a>
<a href="#">Videosec</a>	<a href="#">Vision Hi-Tech</a>	<a href="#">Vista</a>	<a href="#">Vitek</a>	
<a href="#">VIVOTEK</a>	<a href="#">Wavekrom</a>	<a href="#">Yudor</a>	<a href="#">Zavio</a>	
<a href="#">3S vision</a>	<a href="#">3M</a>			
<b>Supported Languages (17 languages)</b>	Czech, Chinese(Simplified), Chinese(Traditional), English, Finnish, French, Germany, Italian, Japanese, Korean, Polish, Portuguese (Brazil), Russian, Spanish, Swedish, Thai, Turkish			
* NUUO Titan and Titan Pro licenses are not compatible with each other. Only 1 type of license may be installed onto a single server.				
** Refer NUUO web site for hard drive compatibility list ( <a href="http://www.nuuo.com/SupportCamera.php?node_id=12">http://www.nuuo.com/SupportCamera.php?node_id=12</a> )				
*** Size of each volume cannot exceed 16TB				
<b>Remote Client System Minimum Requirement (for CT series and NT series)</b>				
<b>Model</b>	<b>NT-4040</b>	<b>NT-4040R</b> <b>TP-4160R</b>	<b>NT-8040R</b> <b>TP-8160R</b>	<b>NT-8040RP</b> <b>TP-8160RP</b>
<b>CPU</b>	Intel Core 2 Duo, 2.6GHz			
<b>Display Card</b>	NVIDIA or ATI with 1GB memory (OpenGL 2.0 and later)			
<b>OS Supported</b>	Microsoft Windows		Mac OS X	
	Windows XP (32-bit) Windows 7 (32/64-bit) Windows 8 (32/64-bit) Windows 8.1 (32/64-bit) (TP series)		Mac OS X 10.7 Mac OS X 10.8 Mac OS X 10.9 (TP series)	
	It is suggested to use 64 bit system for best system performance.			
<b>RAM</b>	2GB			
<b>LAN Transmission Speed</b>	10/100/1000 Mbps (RJ45)			
<b>User Interface</b>	1. Application: <ul style="list-style-type: none"> <li>• NuClient</li> <li>• NUUO Verification Tool</li> </ul> 2. Web browser			

- Internet Explorer 8, 9, 10, 11
- Firefox 23 and above (Windows version)
- 3. iViewer for NUUO iPhone, iPad, and Android mobile

### Titan Pro vs Titan NVR Specification

Feature	Titan Pro	Titan NVR
Max. camera channels per recording server	64	<b>64</b>
Number of Stream Out per Recording Server	<b>256</b>	<b>128</b>
Recording throughput	Up to 550 Mbps	<b>Up to 250 Mbps</b>
Multi-Site Capability	32 sites	32 sites
Image Fusion	v	
NUUO Fisheye Dewarp	v	
NUUO Adjustable Dewarp	v	
Embedded Context Sensitive Manual	v	
Volume Group for Load Balancing	v	
Individual Retention Condition	v	
3 <sup>rd</sup> Party Integration (Access control, Point of Sale, License Plate Recognition)	v	
PCI compliant for POS Applications	v	
Diagnostics Service	v	
Boost Recording	v	
Multi stream setting	v	
SDK Support	v	
Client Support	Windows/Mac	Windows/Mac

### Technical Details

#### • **System, Setting, Management and Integration**

- **System Navigator:** Use one NuClient to login multiple servers. Watch videos from different servers simultaneously. Configuration on different servers can also be accomplished.
- **Linux Based:** Stable, reliable and virus free.
- **Camera Integration:** Open platform support multiple camera brands, models and RTSP stream, UPnP search and ONVIF ProfileS. Centrally configure camera parameters including video format, resolution, frame rate, and lens setting.
- **Multiple and High Channel Streaming:** Stream up to 256 connections per server to multiple clients simultaneously for live view. Support multiple stream profile from cameras, displaying lower bit rate but still record with good quality.
- **Authorization Management:** Manage function privilege, device access permission and priority with unlimited roles, users and user groups.
  - Customized login period by users
  - Privilege by function
  - Access permission by device

- PTZ control priority
- Priority for Video Wall control

- **Third Party Integration:** Integrate third party data and video on unified management platform. The plugin structure allows user extend the system by plugin installing.
- **Schedule-Based Architecture:** Unified Schedule Profile for event, users login duration, recording schedule, recording parameter and 3rd party streaming for complicate environment and requirement.
- **Multiple Video Codec Support:** NUUO Titan Pro supports H.264, MJPEG, MPEG4 and MxPEG for best quality and storage usage.
- **Event/ Action Management:** Centrally manages events from system, cameras, 3<sup>rd</sup> party metadata devices, and I/O devices with instant alert responses. Event and boost record reduce storage usage but ensure important period recording.
  - **Event**
    - System event
      - Server disconnect
      - Fail to write to drive
      - Volume operation error
      - Volume Group no functional volume
      - Recording Module error
      - Power Failed (Redundant power)
      - Auto Backup Failed
      - No available Failover Server for disconnected Recording Server (available in Ultimate)
    - Camera event
      - Camera Motion Detection
      - Connection lost
      - No enough space for retention days
    - Digital input event
      - Input signal on
    - 3<sup>rd</sup> party metadata event
      - Transaction Start
      - Transaction Stop
      - Up to 10 user-definable events
  - **Action**
    - Auto Video Popup to NuClient when event happens
    - Video edge display on client
    - NuClient play alert sound
    - Send E-mail
    - Camera go to preset point
    - Trigger Digital Output
- **Centralized System Status Overview:** Real-time monitoring the status of all servers, cameras, IO devices, and metadata channels.
- **Automatic NUUO Titan server Search:** Automatically search for all NUUO Titan Pro in the network.
- **Automatic Camera Model Detection:** Automatically search for IP cameras in the network (camera should support UPnP protocol) or manually insert it. Auto detection help users to find the brand and model of the camera after specifying its IP address.
- **Dual Gigabit Ethernet Ports:** NUUO Titan Pro is equipped with 2x gigabit ports. User can separate the recording stream from viewing stream to ensure the cleanest recording pipeline.
- **I/O Event Control:** With the integration of camera I/O and NUUO I/O Box, system can start recording or trigger instant alert when input triggered, or trigger output as an event happened.



- **License Management:** Extendable license activation for up to 64CH per Recording Server, and unlimited channel per system. Supports online/ offline activation and transfer. It is scalable to upgrade system from Enterprise to Ultimate by simply activate upgrade license.
- **NTP Date/ Time Synchronization:** The system can interface to Internet Time Server (NTP server) for time and date synchronization at each location. Titan Pro can play the role as NTP server on LAN environment.
- **Watchdog:** Support software watchdog and hardware watchdog (TP-8000R and TP-8000RP) to system stability.
- **Diagnostic Service:** A simple tool to retrieving important logs both from servers and clients for troubleshooting.

## Recording, Recycle and Storage:

- **High Recording Throughput (250Mbps for Single Volume):** Process large amount of data throughput boost Titan Pro's recording performance to 250 Mbps for single volume, about 64CH 5-Megapixel cameras (H.264, 15 fps, moderate traffic). Volume group mechanism can further increase the throughput.
- **Volume Group:** Volume Group mechanism distributes camera throughput loading to multiple volume groups so that further enlarges recording throughput. It can also maximize recording spec or have different levels of data protection

\*Throughput testing result:

- Total 250 Mbps for 1 Volume Group per TP-8000/TP-8000R
- Total 400 Mbps for 2 Volume Group per TP-8000/TP-8000R
- Total 550 Mbps for 3 Volume Group per TP-8000/TP-8000R

- **Individual Recycle Condition (IRC) Per Device:** NUUO Titan Pro supports individual recycle condition (IRC) for each video or metadata device. Videos within specified retention time periods will be protected from recycling deletion. Videos outside the retention time periods will be automatically deleted. When system reaches storage capacity limit, even video data within IRC retention periods will still be deleted to free up additional storage space for Recording. Users will be notified when this occurs.
- **RAID:** Support RAID 0, 1, 5 and 10 for maximum capacity or data protection at the HDD level.
- **Multiple Recording Modes:** NUUO Titan Pro supports multiple event-based and schedule-based recording modes. It also supports pre-event and post-event record to make sure seamless protection.

\*Supported recording mode:

- Continuous record
- Digital-Input-triggered record
- Motion-triggered record
- Event-triggered record
- Boosting record
- Record by schedule
- Manually triggering record on NuClient

- **External Storage:** Support SAN (iSCSI) and DAS (eSATA).
- **Edge Motion:** Support camera edge motion detection, reduce server loading and ensure stability. With event-action management and recording mode in Titan Pro, user can monitor system easily.
- **Audio:** Support camera audio and audio recording.
- **Watermark:** Protect original recording from alternation with our watermark verification tool.

## • Remote Operation:

- **Unified NuClient:** Simply login NuClient to configure, live view or query video from all servers on the system. Support identical, full featured software client application and web client by browser.
- **Cross Platform:** NuClient supports both Windows and Mac OS. The web client support both IE browser and Windows Firefox.
- **10x10 monitoring:** The system manages up to 100 channels live view and 100 channels playback simultaneously per view.
- **NUUO Image Fusion Technology:** Manipulating camera views by changing its viewing angle and image size, making viewing easier in both live view and playback. Moreover, users can stitch multiple cameras together to form a unified single view.
- **Layout Wizard:** Intuitive layout customization to meet needs for panorama cameras and camera corridor mode.
- **Centralized I/O Management:** Manage all I/O devices on one I/O panel. Control I/O for event detection, instant action and digital output.
- **Centralized Event Management:** View and search all event on one event panel. Video will pop up by double clicking the event.
- **View Management:** Including View group and View tour, NUUO Titan Pro supports public view for all users and private view for each user. It also supports View Tour to loop through different selected Views.
- **PTZ Control:**
  - Support physical Pan/Tilt/Zoom, camera preset point and Patrol
  - PTZ/Preset/Patrol control privilege and priority by device
  - Support digital PTZ. Easily monitor one camera on multiple grid with different zone to enlarge the usability of megapixel cameras
  - Event trigger camera goes to specific preset point
  - NUUO Dewarp 2.0-- Generic fisheye dewarp for all fisheye camera integrated
  - Support Immervision and fisheye cameras
- **Instant Playback:** User can view instantly play the last few minutes of video via double click event, E-Map notification, or video tool bar. The intuitive GUI enable users easily export instant playback video or sync to Playback.
- **Multi-View:** NUUO Titan Pro can duplicate the same live view video onto multiple channels and digitally zoom in to see the details of different spots on cloned channels without losing the original live view video.
- **NUUO Dewarp 2.0 Module**
  - Generic dewarp technology to process all types of fisheye-warp video.
  - Manual calibration for precise dewarp video
  - Client display supports 4 modes: Original mode, PTZ mode, Quad mode and Perimeter mode.
  - GPU acceleration to increase dewarp performance
  - Camera pre-calibration for dewarp accuracy
- **Joystick:** Utilize joystick and keyboard to control cameras physical PTZ and software enabled digital PTZ function.
- **Snapshot:** Easily take snapshot in BMP/JPEG during live viewing or playback. User can also take snapshot for whole View.
- **Centralized E-Map:** Tree structured E-Map with unlimited map layers. Supports intuitive GUI indicators of cameras, I/O devices, POS, Access Control and all server locations to have real-time system monitor. Supports notification on indicator when event happened, double click popup live video and instant playback, drag and

drop cameras from map into live view, and one click exam device property.

- **Auto-switch Stream Profile:** Automatically switch stream profile base on the grid layout to fulfill both need of best quality of viewing and the loading of client computer.

- **Playback, Search, Export and Secure Data**

- **Intuitive Interface:** Browse video with GUI timeline and intuitive interface of playback, reverse playback, skip forward/backward, speed up/down, and play by speed shuttle.
- **Intelligent Search:** Intuitive post-event motion search for suspicious areas on video and post-event 3rd party data keyword search then query related camera recording. The system can also search events and double clicking query associated recording to quickly figure out flagged events.
- **Evidence Export:** Export video or third party device data in AVI Snapshot and print video image in BMP/ JPEG
- **Backup:** Support automatically backup videos to FTP and manually backup video from any recording servers.
- **Post-Recording Processing:** Support Intelligent search, Image fusion, digital PTZ, and Panorama 360° PTZ

- **External Device**

- **Remote I/O Modules:** Analog devices that are connected to NUUO I/O Modules are converted to Ethernet through a media converter which enables NUUO Titan Pro to starting recording when inputs are triggered, or trigger outputs when an event occurred.
- **Redundant Power Supply:** TP-8000RP supports internal redundant power supplies. This ensures seamless operation even when the primary power supply has failed. Failed power supplies can be replaced while system is still operating.
- **APC UPS:** NUUO Titan Pro supports external UPS (Uninterrupted Power Supply) power supplies which provide clean uninterruptable power.